
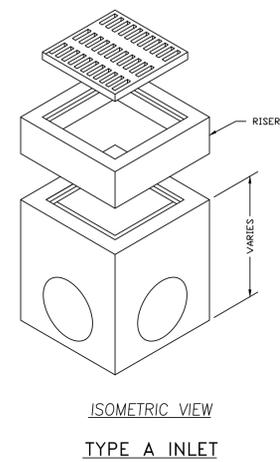
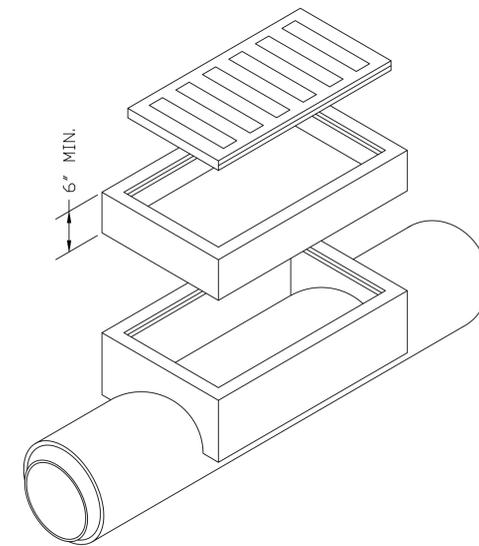





FILLING IN AN OPEN DITCH

NOTES:

1. MINIMUM LOT FRONTAGE SHALL BE ONE HUNDRED (100) FEET.
2. MINIMUM DISTANCE BETWEEN DRIVEWAYS SHALL BE FORTY-FIVE (45) FEET EDGE TO EDGE.

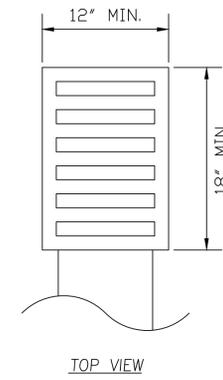

STORM SEWER STANDARD  
DETAILS (CONTINUED)



DEPARTMENT OF  
ENGINEERING  
& PROJECTS

FILE NAME:  
14-SWSSD2-2022.DWG

DATE APPROVED: MARCH 30, 2022  
SCALE: NTS REVISED DATE: MARCH 2022

PROJECT NUMBER: DATE SUBMITTED: SHEET:  
1 OF 1